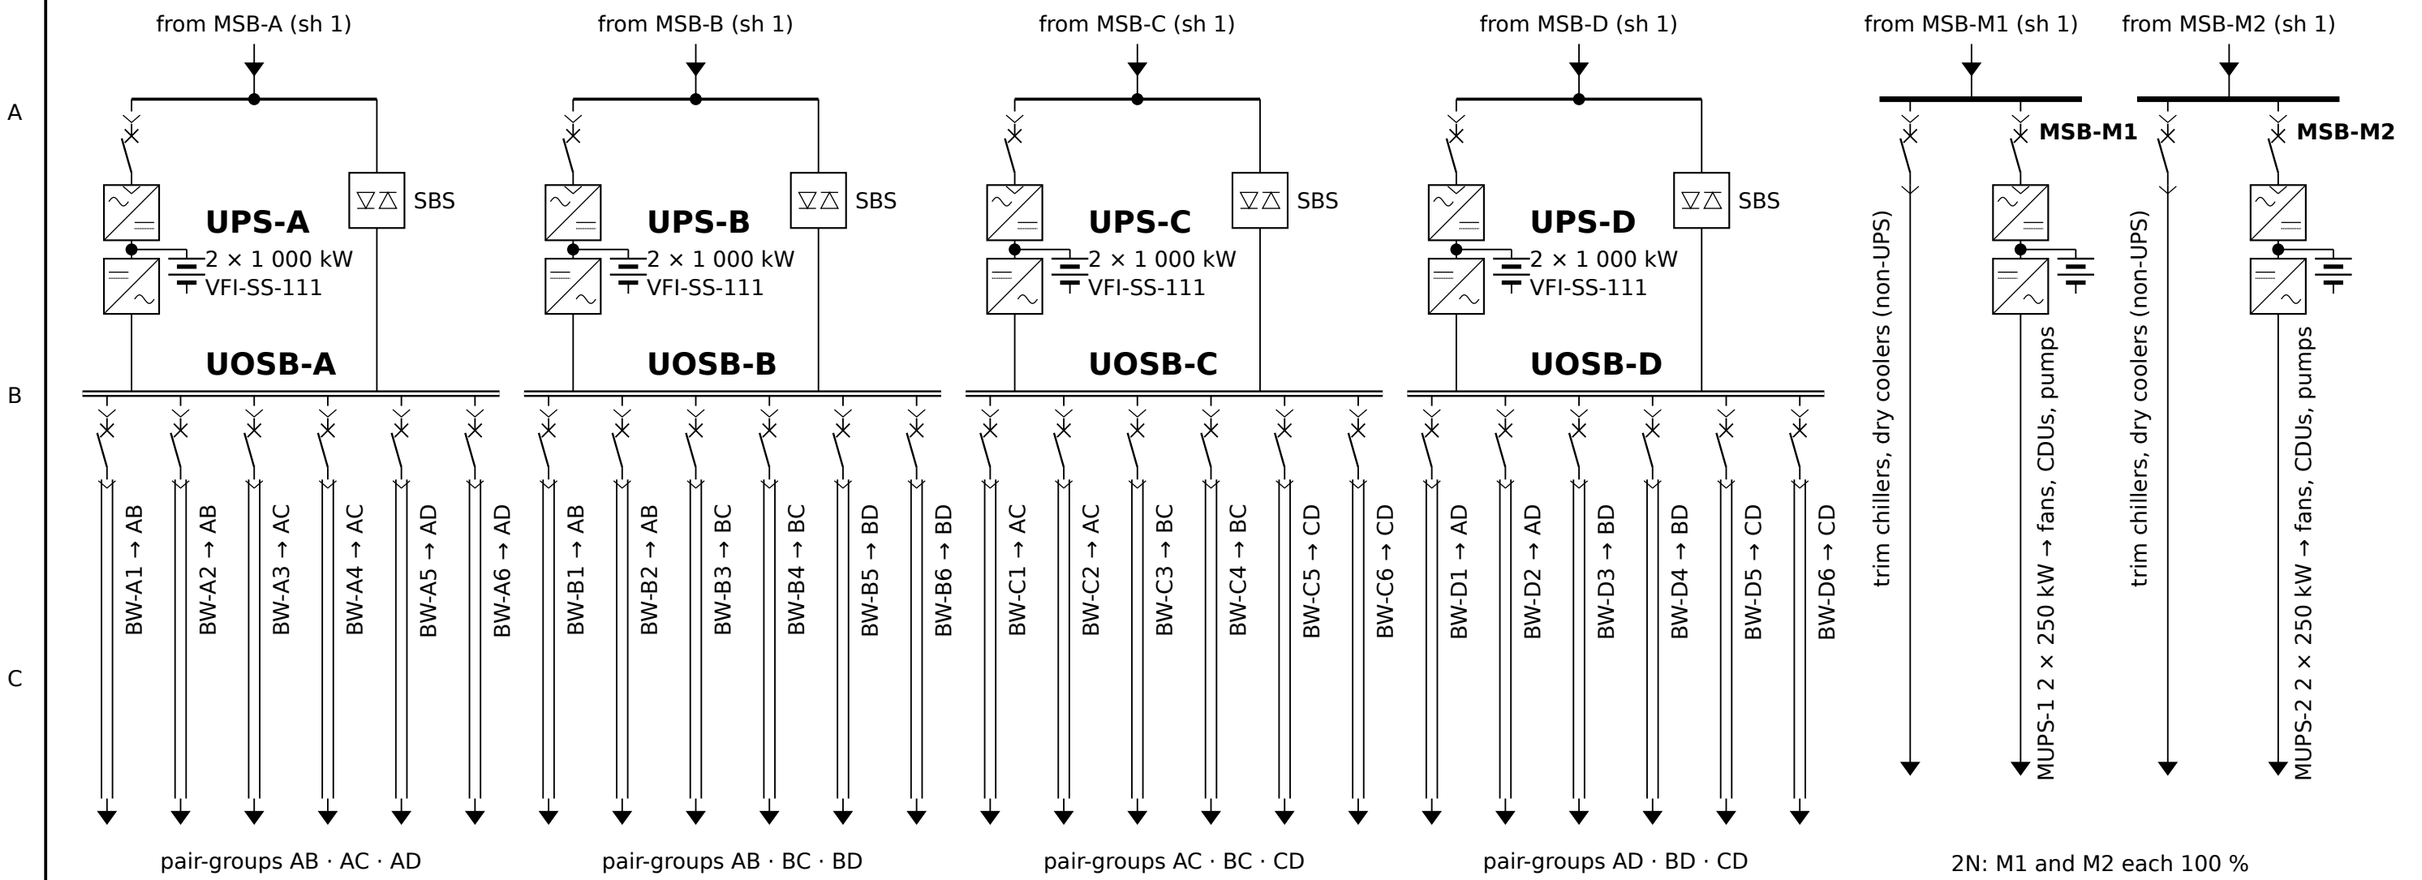

4N/3 ALLOCATION

Pair-group	Busways (block 1)	Busways (block 2)	IT load
AB	BW-A1, BW-A2	BW-B1, BW-B2	0.83 MW
AC	BW-A3, BW-A4	BW-C1, BW-C2	0.83 MW
AD	BW-A5, BW-A6	BW-D1, BW-D2	0.83 MW
BC	BW-B3, BW-B4	BW-C3, BW-C4	0.83 MW
BD	BW-B5, BW-B6	BW-D3, BW-D4	0.83 MW
CD	BW-C5, BW-C6	BW-D5, BW-D6	0.83 MW

Each rack is dual-corded to the two blocks of one pair-group (2 busway runs per block).

LOADING (CALC-002)

Case	Block load	UPS	Busway
Normal	1.25 MW	63 %	307 A
Loss of 1 block	1.67 MW	83 %	614 A
DCIM limit	≤ 1.67 MW	—	Ir 800 A

NOTES

1. UOSB 3 200 A, Icw 65 kA 1 s; SPD type 2.
2. Busway MCCB 800 A current-limiting, Icu ≥ 50 kA, tested conditional rating ≥ 40 kA (IEC 61439-6).
3. Busway 800 A, Icw 36 kA; tap-off 63 A MCCB Icu ≥ 36 kA; rack PDU SCCR ≥ 15 kA (CALC-003).
4. Battery per UPS module LFP 165 kWh (5 min).
5. Block A detail: SLD-003 sh 1–2.

P2	2026-10-25	CALC-002/3/4 ratings, IEC symbols, ≥2.5 mm text
P1	2026-10-24	First concept issue

Nordic Hyperscale DC Campus (fictional) · 30 MW IT · SE3
Portfolio D. Wu · public standards and [ASSUMED] data only

Data hall DH-1 — sheet 2
UPS, UOSB, busways to 4N/3 pair-groups; mechanical 2N
CONCEPT · NOT FOR CONSTRUCTION · scale NTS · A3

Drawing no.	Sheet	Rev
DWU-DC-E-SLD-002	**2 / 2**	**P2**